



SKY
LINE
design


GRANITO WHITE



WHITE G 01




WHITE G 104



WHITE G 103




WHITE G 109



WHITE G 113



WHITE G 114



WHITE G 101




WHITE G 110

MARINE BLUE



MARINE BLUE G 01

CHARCOAL

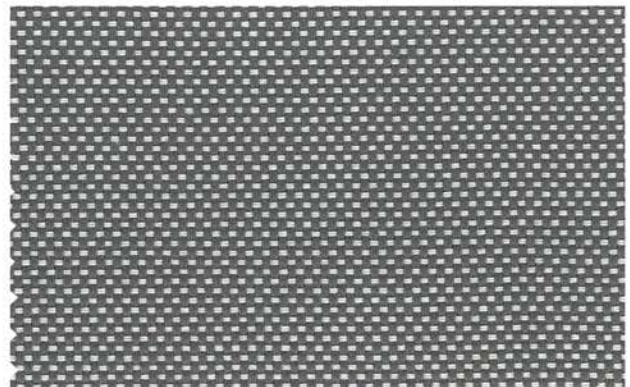

CHARCOAL G 01




MARINE BLUE G 110




CHARCOAL G 100


SARGA

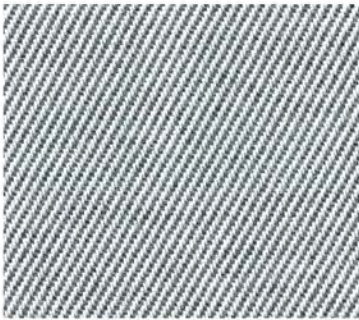

WHITE S 101

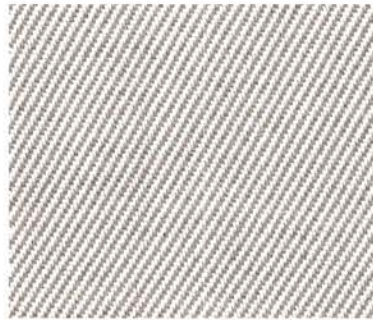

WHITE S 103

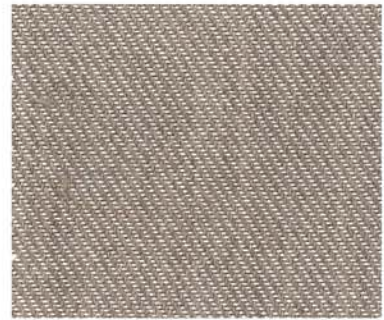

WHITE S 01

GRANITO TERRA



TERRA G 01



TERRA G 115



TERRA G 107



TERRA G 106




TERRA G 101



TERRA G 114




CHAMPIGNON G 109





ALBERSUN®

GRANITO GREY

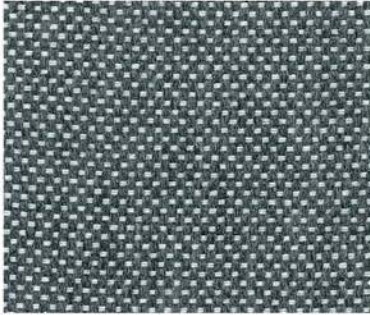

GREY G 01




GREY G 100



GREY G 112



GREY G 113

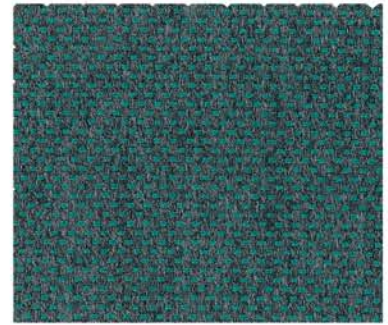

GREY G 114





LAGOON G 103



RED-G 105



TECHNICAL SHEET

Composición / Composition	100% Acrílico / 100% Acrylic
Teñido / Dye stuff	Tintado en masa / Solution dyed
Acabado / Finishing	CerdaCoat®
Ancho útil / Usable width	160 cm (estándar / standard) 320 cm (especial / by request)
Urdimbre / Warp Composición / Composition Número de hilos / Yarn count	100% acrílico tintado en masa / 100% Solution dyed acrylic Nm 34/2c
Trama / Weft Composición / Composition Número de hilos / Yarn count	100% acrílico tintado en masa / 100% Solution dyed acrylic Nm 34/2c
Estructura / Weaving structure	P Plana / Plain S Sarga / Twill G Granito / Granite
Peso m² / Weight m²	P: 240-260 g/m ² • S/G: 260-280 g/m ²
Solidez a la luz / Light Fastness UNE-EN ISO 105-B02:2014 Method 2	7-8/ 8
Resistencia al fuego / Fire resistance BS5852 0/1 (*) Part 2 with finish treatment by request UNE1021 1 (*) Part 2 with finish treatment by request BS7176 Low Hazard	PASA / PASS
Protección UV / UV protection	UV50 +
Solidez al lavado / Fastness to washing ISO 105-C06:2010	5 / 5
Encogimiento Lavado 40°C, secado <i>Shrinking Washing 40°C, drying</i> UNE-EN ISO 5077:2008 + ERRATUM:2008	Trama / Warp: -2.0% Urdimbre / Weft: -1%
Resistencia al pilling / Pilling resistance UNE-EN 14465:2004+A1:2007 UNE-EN ISO 12945-2:2001	4-5 / 5
Resistencia del color al frote / Colour fastness to rubbing ISO105-x12:2016	Seco / Dry: 4-5 / 5 Húmedo / Wet: 4-5 / 5
Resistencia a la abrasión / Abrasion resistance UNE-EN 14465:2004+A1:2007 Based on 12947-2:1999/AC:2006	28.000 ciclos / 28.000 cycles
Oeko-tex Standard 100 Class 1	SI / YES



Lavado / Cleaning



Lavado a máquina (max 40°C) con jabón neutro
Machinwe wash (max 40°C) with neutral soap



No blanquear
Do not bleach



Secadora a temperatura baja
Tumble dry low temperature



No lavar en seco
Do not dry clean



Planchado a temperatura media (extendiendo un paño en medio)
Steam iron at medium temperature (extending a cloth in-between)



JOENFA

Pol. Ind. San Cristóbal
C/ La Solana, Parc A1
46630 Fuente La Higuera, Valencia (Spain)
Tel. + 34 96 223 20 32
comercial@joenfa.es
www.joenfa.es